



REV	DESCRIPTION	ECN NO.	NAME	DATE
A	FIRST ISSUE		Fude Wang	2015-10-14

SALES DRAWING

NOTICE:	ALL PARTS MUST MEET
RoHS	TO RoHS REQUIREMENTS

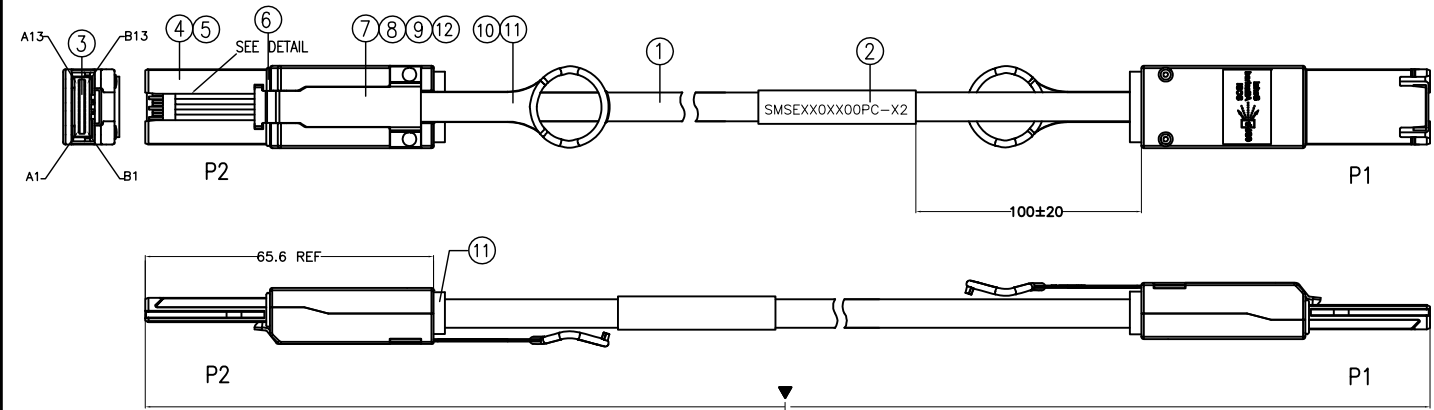


LABEL INFORMATION



产品料号
版本号, *表示A/B/C...
YYMM表示日期, xxxx表
示序列号
0001, 0002, 0003,

2,4,6 UNIVERSAL KEY



SEE DETAIL
(SCALE 2:1)

SLK料号	L /mm	TOL /mm
SHSE3000500PC-X2-XX	500	± 20
SHSE3001000PC-X2-XX	1000	± 30
SHSE3001500PC-X2-XX	1500	± 30
SHSE3002000PC-X2-XX	2000	± 50
SHSE3002500PC-X2-XX	2500	± 50
SHSE3003000PC-X2-XX	3000	± 50
SHSE3004000PC-X2-XX	4000	± 80
SHSE3005000PC-X2-XX	5000	± 80
SHSE3006000PC-X2-XX	6000	± 80
SHSE3007000PC-X2-XX	7000	± 100


WIRING TABLE

GROUND	A1		B1	GROUND
RX0+	A2		B2	TX0+
RX0-	A3		B3	TX0-
GROUND	A4		B4	GROUND
RX1+	A5		B5	TX1+
RX1-	A6		B6	TX1-
GROUND	A7		B7	GROUND
RX2+	A8		B8	TX2+
RX2-	A9		B9	TX2-
GROUND	A10		B10	GROUND
RX3+	A11		B11	TX3+
RX3-	A12		B12	TX3-
GROUND	A13		B13	GROUND
GROUND	B1		A1	GROUND
TX0+	B2		A2	RX0+
TX0-	B3		A3	RX0-
GROUND	B4		A4	GROUND
TX1+	B5		A5	RX1+
TX1-	B6		A6	RX1-
GROUND	B7		A7	GROUND
TX2+	B8		A8	RX2+
TX2-	B9		A9	RX2-
GROUND	B10		A10	GROUND
TX3+	B11		A11	RX3+
TX3-	B12		A12	RX3-
GROUND	B13		A13	GROUND
SHELL			SHELL	

MATERIAL RoHS COMPLIANT:

- CABLE
CONDUCTOR: SOLIDER SILVER PLATED COPPER
DRAIN WIRE: TINNED COPPER
PAIR SHIELD: HOT MELT ALUMINUM MYLAR
- EXT MINI-SAS 4X CABLE PLUG:
BACK SHELLS -NICKEL PLATED ZINC.
PULL LATCH - NYLON.
PCB - ISOLA 370HR.
RIVETS - ALUMINUM ALLOY.
SCREW - SUS 301.
EMI SHIELD - SHIELD FOAM.
- THIS PRODUCT CONFORMS TO THE MECHANICAL DIMENSIONING REQUIREMENTS OF SFF-8088
- ELECTRICAL TEST PLS REFER TO SLK STANDARD ES-003
- THIS PRODUCT MEETS SAS2.1
- THE DIMENSION MARKED ▼ SHOULD BE CHECKED BY QC.

12	INNER MOLDING, HOT MELT GLUE 6208	2
11	CABLE SR FOR SFF-8088,PVC, BLACK.	2
10	PULL TAB FOR SFF-8088, PA66, BLACK	2
9	LATCH FOR SFF-8088, STEEL S301.	2
8	SCREW FOR SFF-8088, S301.	4
7	REVIT FOR SFF-8088, Ø1.5*3.9MM, ALUMINUM.	4
6	GASKET FOR SFF-8088, SHIELD FOAM,	2
5	BACK SHELL FOR SFF-8088(Key: #2.4.6),	2
4	BOTTOM SHELL FOR SFF-8088, ZANI	2
3	PCB FOR SFF-8088, 28~30AWG, PLATING AU 30U".	2
2	LABEL, L60*W30mm,	1
1	CABLE 8P*XXAWG CABLE, PVC, BELDEN / HONGLIN	1
S/N	DESCRIPTION	QTY



CUSTOMER P/N.				PART NO.		SLK -SUPERLINK-	
UNIT	MM	SCALE	N/A	SMSEXX0XX00PC-X2			
≤0.5m ±30mm ≤4m ±50mm ≥4m ±80mm				APPROVED Billy Yan		TITLE EXT MINI SAS 26P CABLE ASSEMBLY SFF-8088, XXAWG, 6.0G	
				CHECKED MaoQing		DRAWING NO. SMSEXX0XX00PC-X2-XX	
				DRAWN Fude Wang		REV NO. A	
DATE 2015-10-14				Page 1/1			